

| Please write clearly in I | block capitals. | | |
|---------------------------|-----------------|------------------|--|
| Centre number | | Candidate number | |
| Surname | | | |
| Forename(s) | | | |
| Candidate signature | | | |
| | | | |

AS PHYSICS

Paper 2

Friday 18 May 2018 Morning Time allowed: 1 hour 30 minutes

Materials

For this paper you must have:

- a pencil and a ruler
- · a scientific calculator
- a Data and Formulae booklet.

Instructions

- Use black ink or black ball-point pen.
- Fill in the boxes at the top of this page.
- Answer all questions.
- You must answer the questions in the spaces provided. Do not write outside the box around each page or on blank pages.
- Do all rough work in this book. Cross through any work you do not want to be marked.
- Show all your working.

Information

- The marks for questions are shown in brackets.
- The maximum mark for this paper is 70.
- You are expected to use a scientific calculator where appropriate.
- A Data and Formulae Booklet is provided as a loose insert.

| For Examiner's Use | | |
|--------------------|------|--|
| Question | Mark | |
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |
| 5–34 | | |
| TOTAL | | |




Section A

Answer all questions in this section.

0 1

Figure 1 shows the apparatus used by a student in an experiment to measure the acceleration due to gravity, g.

Figure 1

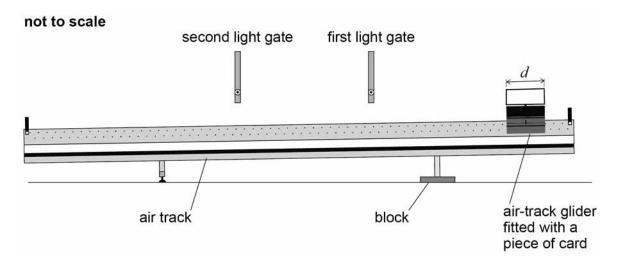

In the experiment:

- a block is used to raise one end of the air track as shown in Figure 1
- an air-track glider is released from rest near the raised end of the air track and passes through the first light gate and then through the second light gate
- a piece of card of length *d* fitted to the air-track glider interrupts a light beam as the air-track glider passes through each light gate
- a data logger records the time taken by the piece of card to pass through each light gate and also the time for the piece of card to travel from one light gate to the other.



Do not write outside the box

0 1 Table 1 gives measurements made with the light gates as shown in Figure 1.

Table 1

| Time to pass through first light gate / s | Time to pass through second light gate / s | Time to travel from first to second light gate / s |
|---|--|--|
| 0.50 | 0.40 | 1.19 |

The length d of the piece of card is $10.0~\mathrm{cm}$

Assume there is negligible change in velocity while the air-track glider passes through a light gate.

Determine the acceleration a of the air-track glider.

[3 marks]

 $m\ s^{-2}$

Question 1 continues on the next page



0 1 . 2

Two further sets of readings, **A** and **B**, are taken each with the light gates in different positions along the air track.

Assume the acceleration is the same in each set.

Table 2 shows these additional sets of results.

Table 2

| Set | Time to pass through first light gate / s | Time to pass through second light gate / s | Time to travel from first to second light gate / s |
|-----|---|--|--|
| Α | 0.61 | 0.42 | 1.77 |
| В | 0.55 | 0.37 | 2.11 |

Explain how the data in **Table 2** show that the distance between the light gates in set **B** is greater than in set **A**.

Assume there is negligible change in velocity while the air-track glider passes through a light gate.

[2 marks]



Question 1 continues on the next page DO NOT WRITE ON THIS PAGE ANSWER IN THE SPACES PROVIDED

Turn over ▶

Do not write outside the box




0 1 . 3

Additional values for the acceleration of the air-track glider are obtained by further raising the end of the air track by using a stack consisting of identical blocks. Adding each block to the stack raises the end of the air track by the same distance.

Figure 2 is a graph of these results showing how a varies with n, the number of blocks in the stack.

Figure 2

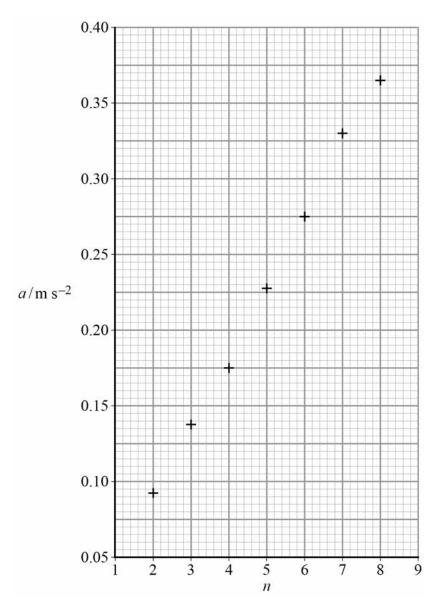

Draw a suitable best-fit straight line on **Figure 2** and determine G, the gradient of your line.

[2 marks]

G = ____




| 0 1.4 | It can be shown that, for the apparatus used by the student, g is equal to $\frac{2G}{h}$ where h is the thickness of each block used in the experiment. | (|
|-------|--|---|
| | The student obtains a value for g of $9.8~\mathrm{m~s^{-2}}$ | |
| | Calculate h. [1 mark] | |
| | <i>h</i> =m | |
| 0 1.5 | Explain how you could find out, without drawing another graph, whether the data presented in the graph in Figure 2 support the suggestion that a is directly proportional to n . [1 mark] | |
| | | |
| | | |



Identical ring magnets **A** and **B** are arranged on a cylindrical wooden rod. The magnets' magnetic poles are on their largest faces. When placed with like poles in opposition, the magnets repel one another as shown in **Figure 3**.

The plan and sectional views in **Figure 3** identify the dimensions of these magnets. Each magnet has a circular cross-section and the central hole is circular.


Figure 3

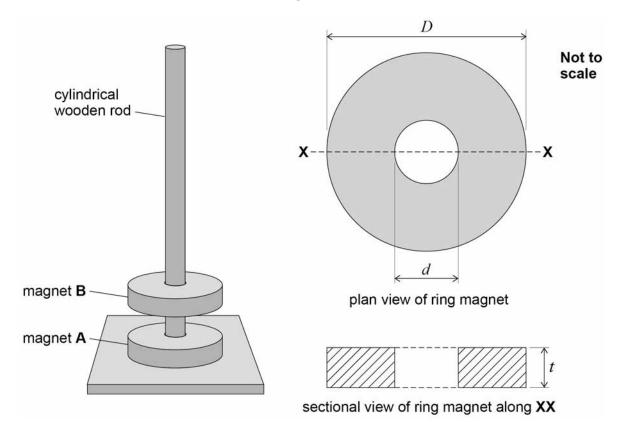



0 2. **1** A student uses digital vernier calipers to find the external diameter *D* of magnet **B**, as shown in **Figure 4**.

Figure 4

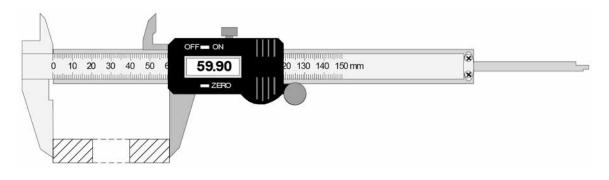

State precautions the student should take to reduce the effect of systematic and random errors when making this measurement.

[2 marks]

| Precaution to reduce effect of systematic error: |
|--|
| |
| |
| |
| |
| Precaution to reduce effect of random error: |
| |
| |
| |
| |

Question 2 continues on the next page




Do not write outside the box

0 2 Figure 5 shows the reading on the calipers as the internal diameter *d* is measured.

Draw the sectional view of magnet ${\bf B}$ on Figure 5 to indicate how d is measured.

[1 mark]

Figure 5

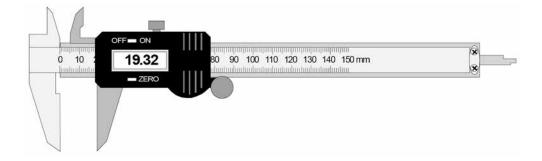




Do not write outside the box

0 2 . 3

Figure 6 shows the reading on the calipers when the thickness t of magnet \mathbf{B} is measured.

Figure 6

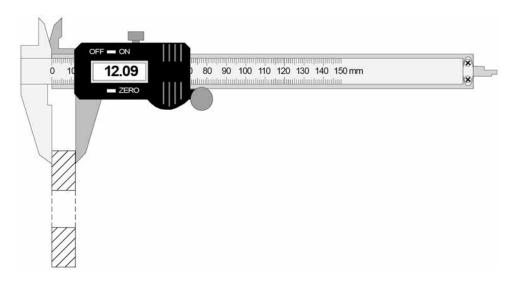

The readings that correspond to the dimensions of magnet **B** are shown in **Figures 4**, **5** and **6**.

Calculate the volume of magnet **B**.

[3 marks]

volume = m^3


Question 2 continues on the next page



0 2 . 4

The student measures the mass $m_{\rm B}$ of magnet **B** and then positions the magnet so it is in equilibrium above magnet **A** as shown in **Figure 7**. The student measures the distance h.

Figure 7

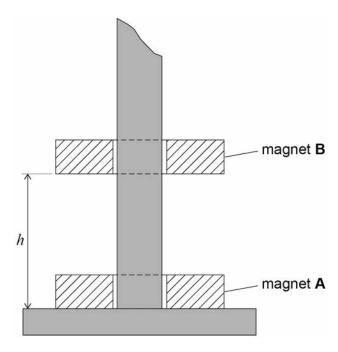

The student adds modelling clay to magnet **B** to reduce h by 50% She measures the mass $m_{\rm C}$ of this clay.

She concludes that the force F exerted on magnet ${\bf B}$ by magnet ${\bf A}$ is given by

$$F = \frac{k}{h^3}$$
 where k is a constant.

Do not write outside the box

Describe an experiment to test the student's conclusion that $F = \frac{k}{h^3}$

Your answer should include:

- the procedure that could be used
- how the data produced could be analysed by a graphical method
 how the value of the constant k could be determined.

[5 marks]

| | | T | |
|--|--|----------|--|

11





Section B

Answer all questions in this section.

- $oxed{0}$ A radioactive source emits alpha particles each with $8.1 \times 10^{-13} \, J$ of kinetic energy.

specific charge of an alpha particle = $4.81\times10^7~C~kg^{-1}$

[2 marks]

The alpha particles travel through air in straight lines with a range of 3.5 cm

Calculate the average force exerted on an alpha particle as it is stopped by the air.

[2 marks]

average force = N


| 0 3.3 | An alpha particle transfers all its kinetic energy to air molecules and produces 5.1×10^4 ions per centimetre over its range of $3.5~cm$ | |
|-------|---|-------|
| | Calculate the average ionisation energy, in eV, of a molecule of air. | arks] |
| | | |
| | | |
| | | |
| | | |
| | ionisation energy = | eV |
| | | |
| | | |
| | Question 3 continues on the next page | |
| | queenen e commuee en me next page | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |



0 3 . 4

A spark counter consists of a wire gauze separated from a metal wire by a small air gap. A power supply with an output of 4500~V is connected in series with a $5.0~M\Omega$ resistor and the spark counter as shown in **Figure 8**. When the radioactive source is moved close to the wire gauze, sparking is seen in the air gap.

Figure 8

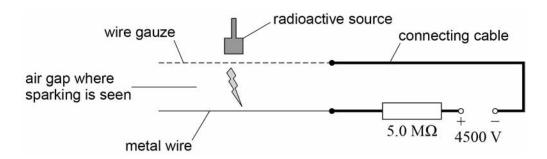

Sparks are produced when alpha particles produce ionisation in the air gap. One ionisation event produces a current of $0.85~\mathrm{mA}$ for a time of $1.2~\mathrm{ns}$

Calculate the number of charge carriers that pass a point in the connecting cable during this ionisation event.


[2 marks]

| number of charge carriers = | |
|-----------------------------|--|
|-----------------------------|--|



| 0 3.5 | The radioactive source was positioned $10~\rm cm$ above the wire gauze before being moved slowly towards the wire gauze leading to the ionisation event in question 03.4 . |
|-------|---|
| | Discuss how the potential difference across the air gap varied as the radioactive source was moved over this distance. |
| | Assume the power supply has negligible internal resistance. [3 marks] |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

Turn over for the next question

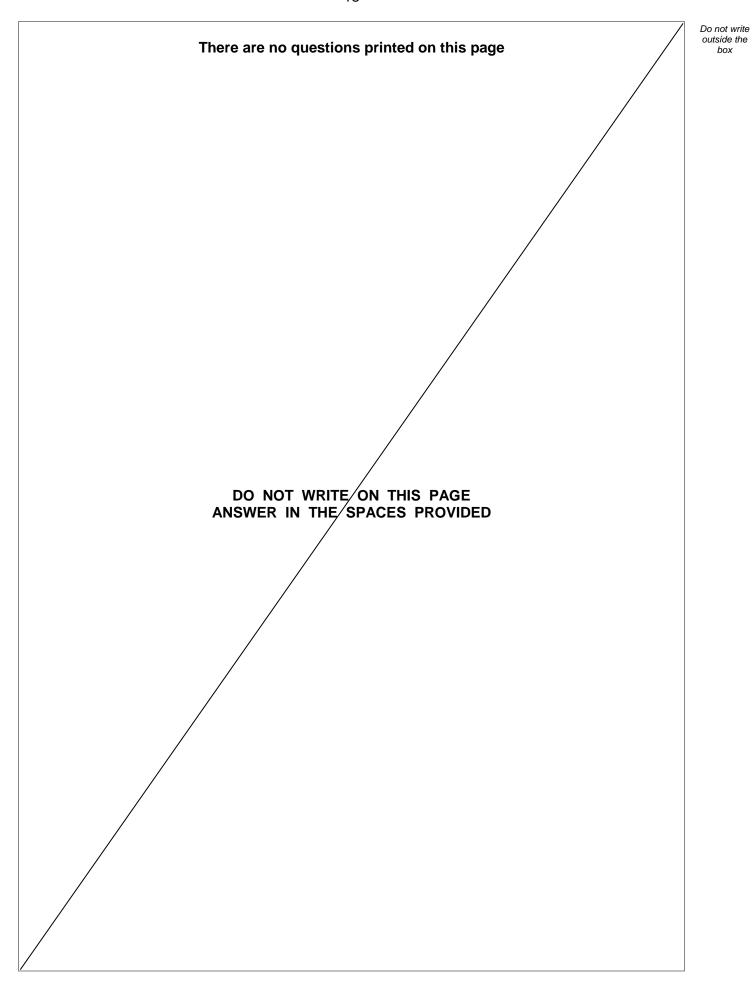




Do not write outside the box

0 4 . 1

Figure 9 shows an incident ray of light being partially reflected at the boundary between glass **A** and glass **B**. The refractive index n_A of glass **A** is 1.461

The speed of light in glass ${\bf B}$ is 3.252% less than the speed of light in glass ${\bf A}$.

Figure 9

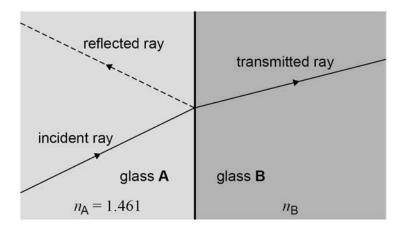

Calculate the refractive index $n_{\rm B}$ of glass **B**.

Give your answer to an appropriate number of significant figures.

speed of light in a vacuum = $2.998 \times 10^8 \ m\ s^{-1}$

[3 marks]


 $n_{\mathsf{B}} \; = \; \underline{\hspace{2cm}}$

Question 4 continues on the next page



0 4 . 2 Figure 10 shows a cross-sectional view of an optical fibre strain gauge.


Figure 10

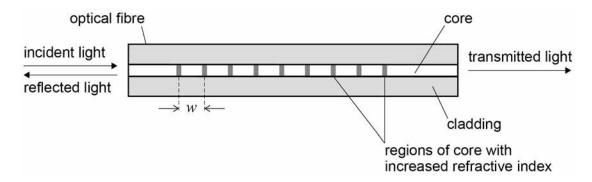

A maximum intensity of the reflected light is produced due to superposition of the light reflected from each of the regions with increased refractive index in the core. This maximum intensity occurs at a particular wavelength λ_R .

Figure 11 shows the relationship between λ_{R} and the strain in the optical fibre.

Figure 11

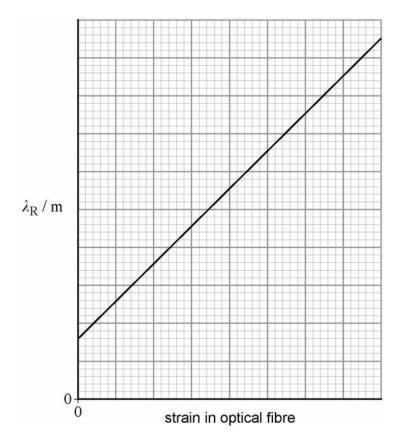



Do not write outside the box


| A cable is used to raise and lower a lift. An engineer fixes the optical gauge to the cable to monitor changes of the strain in the cable. | l fibre strain |
|--|----------------|
| The lift is initially at rest and then accelerates downwards for a short reaching a constant velocity. | time before |
| Discuss how the value of λ_{R} changes. | [3 marl |
| | |
| | |
| | |
| | |
| | |
| | |
| Question 4 continues on the next page | |
| | |
| | |
| | |
| | |



0 4 . 3

Figure 12 shows the relationship between λ_R and the strain in two optical fibre strain gauges **P** and **Q**. The engineer wishes to measure small accelerations in another lift. She can choose to fix either optical fibre strain gauge **P** or optical fibre strain gauge **Q** to the lift's cable.

Figure 12

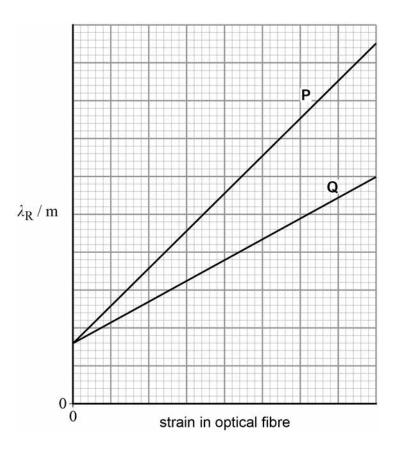

Explain which gauge the engineer should select.

[2 marks]



8

Section C

Each of Questions 05 to 34 is followed by four responses, A, B, C and D.

For each question select the best response.

Only **one** answer per question is allowed.

For each answer completely fill in the circle alongside the appropriate answer.

CORRECT METHOD



WRONG METHODS




If you want to change your answer you must cross out your original answer as shown.



If you wish to return to an answer previously crossed out, ring the answer you now wish to select as shown.

You may do your working in the blank space around each question but this will not be marked. Do not use additional sheets for this working.

0 The graph of neutron number against proton number shows three nuclei **P**, **Q** and **R**.



Which row identifies an isotope of P and the nucleon number of this isotope of P?

[1 mark]

| | Isotope of P | Nucleon number of isotope of P | |
|---|--------------|--------------------------------|---|
| A | Q | y + 1 | 0 |
| В | Q | x + y + 1 | 0 |
| С | R | x + y + 1 | 0 |
| D | R | <i>x</i> + 1 | 0 |



 $^{236}_{\ 92} \rm U$ undergoes a series of decays to produce $^{204}_{\ 82} \rm Pb$.

How many alpha decays are involved in this decay series?

[1 mark]

A 5

0

B 6


0

C 8

0

D 10

- 0
- 0 7 The partially completed diagram represents electron capture.



Which row identifies the exchange particle **Q** and the quark structure of particle **R**? [1 mark]

| | Particle Q | Quark structure of particle R | |
|---|----------------|-------------------------------|---|
| Α | W^- | uuu | 0 |
| В | W^+ | dud | 0 |
| С | W ⁺ | uuu | 0 |
| D | W ⁻ | dud | 0 |




$$K^0 \rightarrow X + Y + \overline{\nu}_e$$

What are **X** and **Y**?

[1 mark]

| | X and Y | |
|---|---|---|
| Α | e ⁺ and e ⁻ | 0 |
| В | $\mu^{^{+}}$ and e^{-} | 0 |
| С | $\pi^{^+}$ and $\mathrm{e}^{^-}$ | 0 |
| D | $\pi^{\scriptscriptstyle -}$ and $\mathrm{e}^{^{\scriptscriptstyle +}}$ | 0 |

The graph shows how the maximum kinetic energy E_k of photoelectrons emitted from a metal surface varies with the reciprocal of the wavelength λ of the incident radiation.



What is the gradient of this graph?

[1 mark]

 \mathbf{A} c

0

 B h

0

C hc

0

 $\mathbf{D} = \frac{h}{2}$

0



Do not write outside the box

| Which ene | gy level diagram rep | oresents this | s process? | | [1 m |
|--------------|----------------------|---------------|--------------|---|------|
| | Α | | | В | |
| ground state | c | | ground state | D | |
| ground state | | | ground state | - | |
| | > | | | | |
| C | | | | | |
| D | > | | | | |



1 1 A particle of mass *m* has a kinetic energy of *E*.

What is the de Broglie wavelength of this particle?

[1 mark]

 $\mathbf{A} \qquad \frac{h}{\sqrt{(2Em^2)}}$



 $\mathbf{B} \qquad \frac{h}{\sqrt{2E}}$



 $\mathbf{C} \qquad \frac{n}{\sqrt{\left(\frac{2E}{m^2}\right)}}$



 $D \qquad \frac{h}{\sqrt{2Em}}$



1 2 Which row links both the photoelectric effect and electron diffraction to the properties of waves and particles?

[1 mark]

| | Photoelectric effect | Electron diffraction | |
|---|----------------------|----------------------|---|
| Α | Particle property | Particle property | 0 |
| В | Wave property | Wave property | 0 |
| С | Particle property | Wave property | 0 |
| D | Wave property | Particle property | 0 |



Measurements are made to determine the tension, length and mass per unit length of a string stretched between two supports. The percentage uncertainties in these measurements are shown below.

| Quantity | Percentage uncertainty |
|----------------------|------------------------|
| Length | 0.80% |
| Tension | 4.0% |
| Mass per unit length | 2.0% |

A stationary wave is formed on the string.

What is the percentage uncertainty in the calculated value of the frequency of the first harmonic?

[1 mark]

A 1.8%

0

B 3.8%

0

C 6.8%

0

D 13%

0

1 4 Which list puts the forces in order of increasing magnitude?

[1 mark]

A 2 pN < 2 fN < 2 TN < 2 GN



B 2 pN < 2 fN < 2 GN < 2 TN



c 2 fN < 2 pN < 2 TN < 2 GN


0

D 2 fN < 2 pN < 2 GN < 2 TN

0

Do not write outside the box

1 5 A ray of light is incident on a glass–air boundary of a rectangular block as shown.

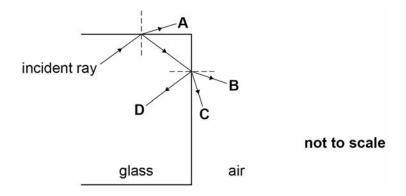

The refractive index of this glass is 1.5

The refractive index of air is 1.0

The angle of incidence of the light at the first glass-air boundary is 44°

What is the path of the ray of light?

[1 mark]

- **A**
- В
- C
- D o

Turn over for the next question




Rays of light are incident at the same angle θ on the core–cladding boundary of optical fibres ${\bf P}$ and ${\bf Q}$.

The cores of $\bf P$ and $\bf Q$ have the same refractive index n.

 ${\bf P}$ and ${\bf Q}$ are the same length L.

The core diameter of **P** is half that of **Q**.

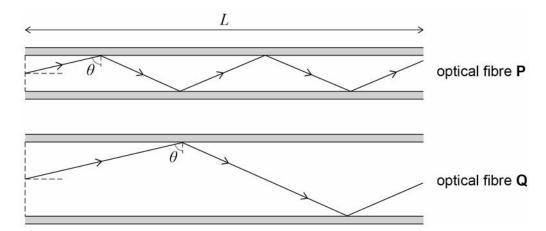

The time for the ray to travel along optical fibre P is

$$\frac{nL}{c\sin\theta}$$

where c is the speed of light in a vacuum.

What is the time for the ray to travel along optical fibre **Q**?

[1 mark]

 $\mathbf{A} \qquad \frac{nL}{c\sin\theta}$

0

 $\mathbf{B} \qquad \frac{nL}{2c\sin\theta}$

0

 $c \frac{2nL}{c\sin\theta}$

0

 $D = \frac{4nL}{c\sin\theta}$

0

| 1 7 | The fundamental frequency f is the lowest frequency heard when a stretched string is vibrating. | | | |
|-----|---|--|----------|--|
| | The | string is now lightly touched one third of the way along its length. | | |
| | Wha | t is the lowest frequency heard? | [1 mark] | |
| | Α | $\frac{f}{3}$ | 0 | |
| | В | $\frac{2f}{3}$ | 0 | |
| | С | f | 0 | |
| | | | | |


Turn over for the next question

Turn over ►

D

3*f*

A diffraction grating is illuminated normally with light of wavelength $6.5\times10^{-7}~m$ When a screen is 1.5~m from the grating, the distance between the zero and first-order maxima on the screen is 0.30~m

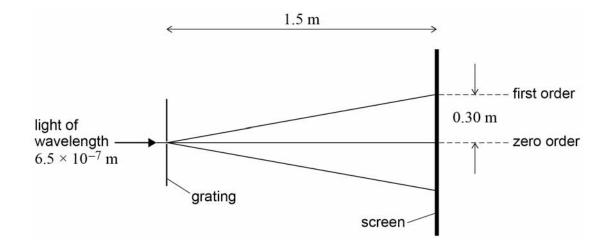

What is the number of lines per mm of the diffraction grating?

[1 mark]

A 3.3×10^{-6}

0

B 3.3×10^{-3}

0

C 3.0×10^2

0

D 3.0×10^5

0

Two points on a progressive wave have a phase difference of $\frac{\pi}{6}$ rad The speed of the wave is $340~m~s^{-1}$

What is the frequency of the wave when the minimum distance between the two points is $0.12 \ m$?

[1 mark]

A 240 Hz

0

B 470 Hz


0

C 1400 Hz

0

D 2800 Hz

- 0
- 2 0 A bird sits on a uniform rod suspended from vertical wires **P** and **Q**.

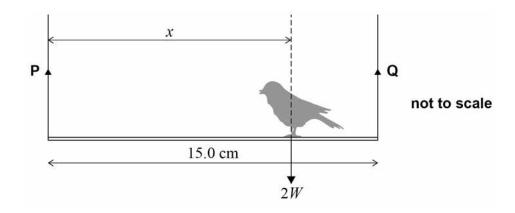

The rod has a weight W and is 15.0 cm long.

The weight of the bird is 2W and acts at a distance x from ${\bf P}$.

What is the value of x when the tension in **P** is half the tension in **Q**?

[1 mark]

A 7.50 cm

0

B 10.0 cm

0

C 11.3 cm

0

D 15.0 cm


0



2 1 A car's engine produces a useful output power of $6.5 \times 10^4 \, \mathrm{W}$

The car of mass 950 kg is moving up a hill at a steady speed.

The slope of the hill is 12° to the horizontal. Resistive forces on the car are negligible.



What is the steady speed of the car?

[1 mark]

A 7.0 m s^{-1}

0

B 12 m s^{-1}

0

C 34 m s^{-1}

0

D 68 m s^{-1}

0

2 2 A girl is bouncing on a trampoline.

Assuming that air resistance is negligible, her acceleration

[1 mark]

A is zero when she is at maximum height.

0

B is constant when she is in the air.

0

c changes direction as she rises and then falls.

- 0
- **D** is maximum just before she lands on the trampoline.
- 0

The table contains information on four wires. It shows the stiffness of each wire and the maximum strain energy stored in the wire when extended to the breaking point.

Assume each wire has the same initial dimensions and obeys Hooke's law.

Which wire extends the least before reaching the breaking point?

[1 mark]

| | Stiffness / N m ⁻¹ | Maximum strain energy / J | |
|---|-------------------------------|---------------------------|---|
| Α | 4.0 | 1 | 0 |
| В | 9.0 | 1 | 0 |
| С | 16 | 3 | 0 |
| D | 25 | 3 | 0 |


Two spheres, **P** and **Q**, have the same volume but **P** has a greater mass. The spheres fall in air at their terminal velocities v_P and v_Q respectively.

Which row states the relationship between v_P and v_Q and the reason?

[1 mark]

| | Relationship between v_P and v_Q | Reason | |
|---|--------------------------------------|--|---|
| Α | $v_{P} = v_{Q}$ | Terminal velocity is unaffected by mass | 0 |
| В | $v_{Q} > v_{P}$ | The mass of Q is less and it accelerates more | 0 |
| С | $v_{Q} > v_{P}$ | P reaches equilibrium at a lower terminal velocity | 0 |
| D | $v_{P} > v_{Q}$ | Q reaches equilibrium at a lower terminal velocity | 0 |

2 5 An aircraft is flying due north through still air with a speed v The aircraft enters a region where the wind is blowing with a speed u from a direction which makes an angle of θ with due south.



What is the time taken for the aircraft to fly a distance ${\cal D}$ due north of its current position in this windy region?

[1 mark]


$$\mathbf{A} \qquad \frac{D}{v - u \cos \theta}$$

$$\mathbf{B} \qquad \frac{D}{v - u \, \sin \theta}$$

$$\mathbf{C} \qquad \frac{D}{v + u \cos\theta}$$

$$\mathbf{D} \qquad \frac{D}{v + u \, \sin\theta}$$

The graph shows how the resultant force F on a football, which is initially at rest, varies with time t.




Which graph shows how the momentum p of the football varies with time t?

Α




В



C



D



[1 mark]

Α



В

| 0 |
|---|
|---|

С

D





2 7 Objects **P** and **Q** are initially at rest at time t = 0

The same resultant force F is applied to ${\bf P}$ and ${\bf Q}$ for time T.

The mass of ${\bf P}$ is 10 times greater than the mass of ${\bf Q}$.

What is the ratio $\frac{\text{kinetic energy of } \mathbf{P}}{\text{kinetic energy of } \mathbf{Q}}$?

[1 mark]

A 0.1

0

B 1




C 10





D 100




2 8 Which graph shows how power dissipated *P* varies with current *I* in a component that obeys Ohm's law?









[1 mark]

- Α
- 0
- В
- 0
- C
- 0
- D
- 0

Do not write outside the box

2 9 1.0 kilowatt-hour (kW h) is equivalent to

[1 mark]

A $6.3 \times 10^{18} \text{ eV}$

0

B $6.3 \times 10^{21} \text{ eV}$

0

C $2.3 \times 10^{22} \text{ eV}$

0

D $2.3 \times 10^{25} \text{ eV}$


0

Turn over for the next question



3 0 The graph shows how the potential difference V across an electrical component varies with current I in the component.

A tangent has been drawn on the curve at point P for a current of I_2 .

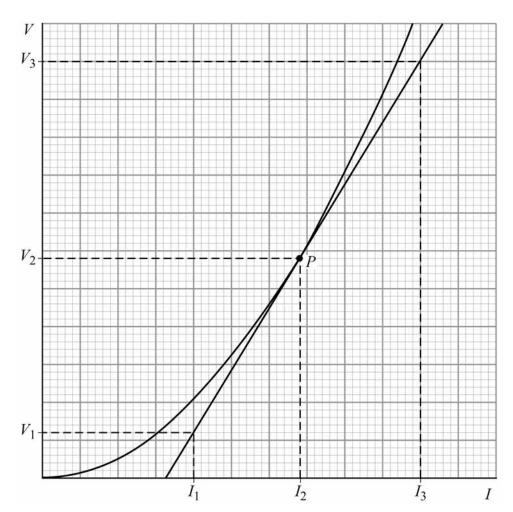

What is the resistance of the electrical component when the current in the component is I_2 ?

[1 mark]


$$\mathbf{A} \qquad \frac{V_3 - V_1}{2I_2}$$

$$\mathbf{B} \qquad \frac{V_3 - V_1}{I_3 - I_1}$$

$$\mathbf{C} \qquad \frac{V_2}{I_2}$$

$$\mathbf{D} \qquad \frac{2V_2}{I_2 - I_1}$$

3 1 A circuit consists of a cell, a thermistor, a fixed resistor and two ammeters.



The cell has a constant electromotive force and negligible internal resistance. Readings from the two ammeters are taken.

Which row describes what happens to the current in each ammeter when the temperature of the thermistor decreases?


[1 mark]

| | Current in ammeter \mathbf{A}_1 | Current in ammeter A_2 | |
|---|-----------------------------------|--------------------------|---|
| Α | Decreases | Unchanged | 0 |
| В | Decreases | Increases | 0 |
| С | Increases | Decreases | 0 |
| D | Increases | Unchanged | 0 |

Turn over for the next question



A circuit consists of two identical cells, a resistor, an ammeter and a voltmeter. The cells each have an emf of 3.0~V and the resistor has a resistance of $12~\Omega$ The cells have negligible internal resistance.



Which row shows the readings on the voltmeter and ammeter?

[1 mark]

| | Voltage / V | Current / A | |
|---|-------------|-------------|---|
| Α | 3.0 | 0.25 | 0 |
| В | 3.0 | 0.50 | 0 |
| С | 6.0 | 0.25 | 0 |
| D | 6.0 | 0.50 | 0 |

3 Which is equivalent to the ohm?

[1 mark]

A $J C^{-2} s^{-1}$



 $\mathbf{B} \qquad \mathbf{J} \; \mathbf{C}^{-2} \, \mathbf{s}$

| 0 |
|---|
| |

C Js




 $D J s^{-1}$

0

Do not write outside the box

The circuit shows a cell with negligible internal resistance connected in a circuit with three resistors, an ammeter and a voltmeter.



Which row shows the readings on the ammeter and voltmeter?

[1 mark]

| | Current / A | Voltage / V | |
|---|-------------|-------------|---|
| Α | 0.075 | 0.75 | 0 |
| В | 0.075 | 1.50 | 0 |
| С | 0.150 | 0.75 | 0 |
| D | 0.150 | 1.50 | 0 |

END OF QUESTIONS



rurn over **►**

There are no questions printed on this page DO NOT WRITE ON THIS PAGE ANSWER IN THE SPACES PROVIDED Copyright information For confidentiality purposes, from the November 2015 examination series, acknowledgements of third party copyright material will be published in a separate booklet rather than including them on the examination paper or support materials. This booklet is published after each examination series and is

Do not write outside the box

available for free download from www.aqa.org.uk after the live examination series.

Permission to reproduce all copyright material has been applied for. In some cases, efforts to contact copyright-holders may have been unsuccessful and AQA will be happy to rectify any omissions of acknowledgements. If you have any queries please contact the Copyright Team, AQA, Stag Hill House, Guildford, GU2 7XJ.

Copyright © 2018 AQA and its licensors. All rights reserved.

